

SL-308US DC Series



SL-308D-12US / SL-308D-24US

Product Features

- For US gang box
- 1-channel/2-channel wall switch sensor
- Can be mounted in a single gang box to replace one / two conventional wall switches
- Adjustable 15s- 30min for Delay-Off time
- Selectable Auto on/Manual on
- Manual toggle switches to turn light ON/OFF
- Bi-Level / Walk Through modes for increased energy savings
- Manual off when 'light off' is desired e.g. during presentation - revert to 'Auto-on' mode if presence not detected after the set time
- Light sensor to turn light on at selected light level
- Override switch to turn light ON/OFF in the event sensor stops working
- SPDT relay for lighting control/ building management system


Specifications

	SL-308S12US	SL-308D12US	SL-308S24US	SL-308D24US
Input Power	12VDC		24VDC	
Output Signal	1-channel(12VDC,15mA)	2-channel(12VDC,15mA)	1-channel(24VDC,15mA)	2-channel(24VDC,15mA)
Supporting Power Pack	PS-112	PS-212	PS-124	PS-224
Relay	SPDT, 30VDC, 1A			
PIR	2-element Pyroelectric			
Operating Temperature	-20°C to +50°C			
Relative Humidity	0% to 90% non-condensing			
Approval	CE			
Dimensions	70mm W x 114.5mm H x 42mm D			

Optical View Pattern



SL-308S-12US / SL-308S-24US

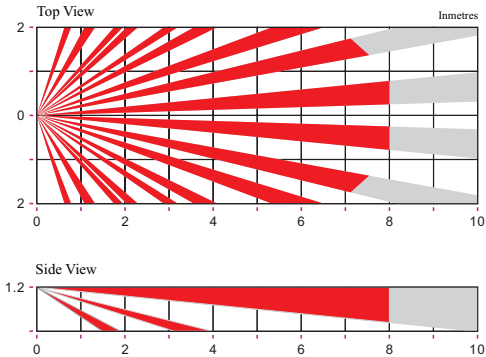

Legend:  
PIR Detection Pattern