

SL-1308US AC Series

Product Features



SL-1308DUS

- For US gang box
- 1-channel/2-channel wall switch sensor
- Power through Live and Ground connection
- Can be mounted in a single gang box to replace one / two conventional wall switches
- Adjustable 15s- 30min for Delay-Off time
- Selectable Auto on/Manual on
- Manual toggle switches to turn light ON/OFF
- Bi-Level / Walk Through modes for increased energy savings
- Manual off when "light off" is desired e.g. during presentation - revert to 'Auto-on' mode if presence not detected after the set time
- Light sensor to turn light on at selected light level
- Override switch to turn light ON/OFF in the event sensor stops working


Specifications

	SL-1308SUS	SL-1308DUS
Input Power	AC 100~277V	
Output Signal	1-channel(AC 250, 10A)	2-channel(AC 250, 10A)
Material	High-strength ABS	
PIR	2-element Pyroelectric	
Operating Temperature	-20°C to +50°C	
Relative Humidity	0% to 90% non-condensing	
Approval	CE	
Dimensions	70mm(W)×114.5mm(H)×42mm(D)	

Optical View Pattern



SL-1308SUS

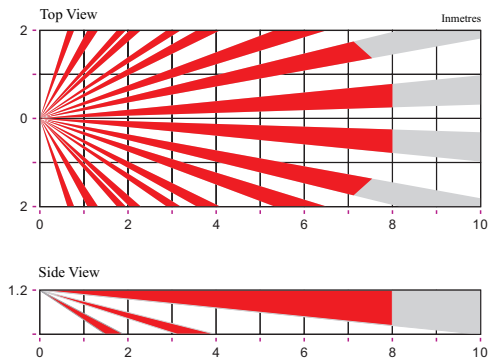

Legend:



PIR Detection Pattern