

## SDL-1308UK AC Series



SDL-1308DUK

## Product Features

- For UK gang box
- PIR + ULTRASONIC technology
- Power through Live and Ground connection
- 1-channel/2-channel wall switch
- Selectable Auto on/Manual on
- Manual toggle switches to turn light ON/OFF
- Light sensor to turn light on at selected light level
- Choice of WALK THROUGH/CORRIDOR mode to turn light off in 5 seconds
- Bi-Level modes for increased energy savings
- Can be mounted in a single gang box to replace one / two conventional wall switches
- Manual off when 'light off' is desired e.g. during presentation - revert to 'Auto-on' mode if presence not detected after the set time
- Adjustable 15s- 30min for Delay-Off time
- Override switch to turn light ON/OFF in the event sensor stops working


## Specifications

	SDL-1308SUK	SDL-1308DUK
Input Power	AC 100~277V	
Output Signal	1-channel (AC 250V, 10A)	2-channel (AC 250V, 10A)
PIR	2-element Pyroelectric	
Ultrasonic Frequency	40Khz	
Approval	CE	
Material	High-strength ABS	
Dimensions	86mm(W)×86mm(H)×42mm(D)	
Operating Temperature	-20°C ~ +50°C	
Relative Humidity	0~90%	

## Optical View Pattern



SDL-1308SUK

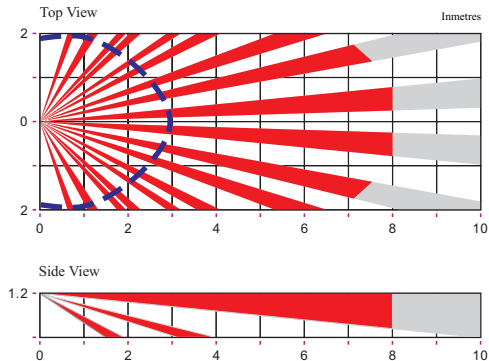

Legend:

